




## MAKE - UP TABLE 3.8 – 5.2

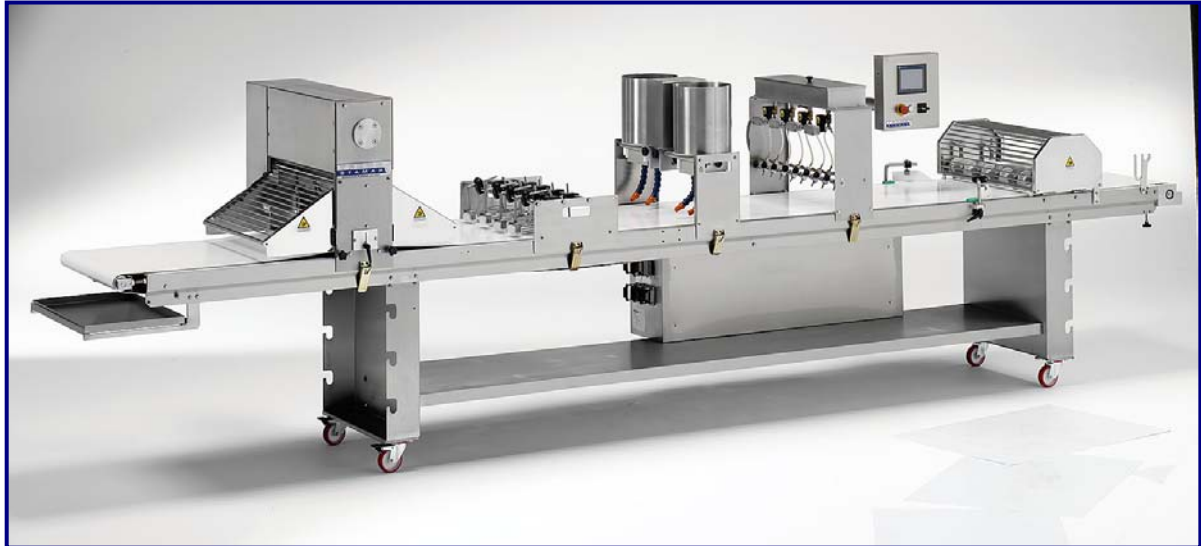

### TECHNICAL DATA

#### MOD. 3.8

##### Technical data:

Conveyor belt width	650 mm
Table length overall	3800 mm
Speed of conveyor belt	0-4.4 mt./min.
Rated power	KW 0.18

#### MOD. 5.2

##### Technical data:

Conveyor belt width	650 mm
Table length overall	5200 mm
Speed of conveyor belt	0-4.4 mt./min.
Rated power	KW 0.18

#### Guillotine

##### Technical data:

Rated power	KW 0.37
Passage of safety guard	45-65 mm

##### a) Cutting

Usable width	580 mm
Cutting length min.	10 mm
No of strokes	70/min.

##### b) Stamping

Stamping length max.	145 mm
Stamping width max.	580 mm
No. Of strokes max.	50/min.
Dough thickness max.	15 mm

#### Filling depositor

##### Technical data:

Hopper content	12 l
Modes of depositing	Continuous Spot Spot without belt Stop
Quality of filling per outlet	Spot 3-60

TEKNO STAMAP srl - Via Vittorio Veneto 141 36040 Grisignano di Zocco (VI) – Italy

E-mail: [sales@teknostamap.com](mailto:sales@teknostamap.com) Web site: [www.teknostamap.com](http://www.teknostamap.com)

Phone +39 (0)444 - 414 731/5 -- Fax +39 (0) 444 - 414719